


NEW

TSURUMI DIESEL ENGINE CENTRIFUGAL PUMPS Powered by Robin Subaru

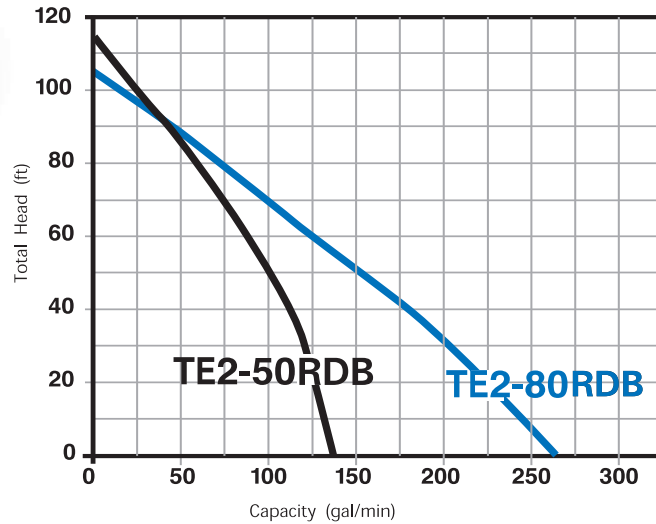

TE2-RDB Series Features

- Heavy-duty Robin Hatz Diesel Engine
- Silicon carbide mechanical seals
- Cast iron impeller
- Cast iron volute casing
- 2" and 3" models can ship by UPS
- Durable rolled-steel frame

		TE2-50RDB	TE2-80RDB
PUMP	Max. Capacity (GPM)	172	212
	Max. Capacity (GPH)	10320	12720
	Max. Head (ft)	98	75
	Max. Solids Diameter (inch)	3/8	3/8
	Impeller Type	Semi-Open	Semi-Open
	Impeller Material	Cast Iron	Cast Iron
	Volute Casing Material	Cast Iron	Cast Iron
	Wear Plate Material	Integral Part of Volute	Stainless Steel
	Pump Casing Material	Die Cast Aluminum	Die Cast Aluminum
	Shaft Seal	Silicon Carbide Mechanical Seal	Silicon Carbide Mechanical Seal
	Seal Lubricant	Water	Water
Discharge Connection	2" Dewatering	3" Dewatering	
Suction Connection	2" Dewatering	3" Dewatering	
ENGINE	Brand	Robin Hatz Engine	Robin Hatz Engine
	Model (without Oil Sensor)	1B 20	1B 20
	Type	Air Cooled, 4-Cycle Single Cylinder	Air Cooled, 4-Cycle Single Cylinder
	Oil Sensor	with Oil Sensor	with Oil Sensor
	Output (hp)	4.9	4.9
	RPM	3600	3600
	Fuel	Diesel	Diesel
	Fuel Tank Capacity (US Gal.)	0.78	0.78
	Continuous Time per Tank (Hr.)	3.0	3.0
Starting Method	Recoil Starter	Recoil Starter	
SHIPPING	Dimensions (Length)	24 13/16	24 13/16
	(Width)	17 15/16	17 15/16
	(Height)	22 1/4	22 1/4
	Weight (lbs.)	95.1	97.3



Tsurumi (America), Inc.
 845 N. Dillon Dr. Wood Dale, IL 60191
 Toll Free: 1-888-878-7864 Fax: 630-766-6445
 www.tsurumiamerica.com info@tsurumiamerica.com